



Torque-Tech Newsletter

Monthly Offer | Hot News | Exhibition Information | Contact Us

Monthly Offer

FLEXIBLE SPLIT-BEAM TORQUE WRENCH






Setting displayed in window




Open the hinge cover - adjust setting by knob (PAT.)

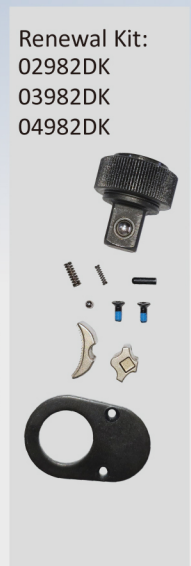


Renewal Kit:
02982DK
03982DK
04982DK



Renewal Kit:
04984DK
06982DK

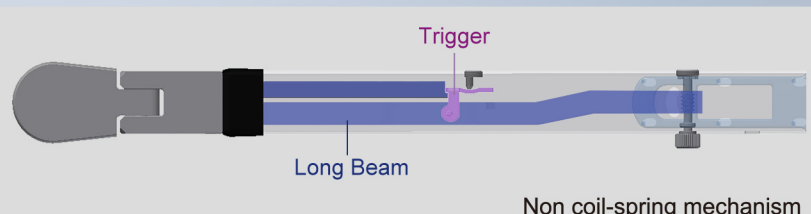

Trigger
Long Beam
Non coil-spring mechanism

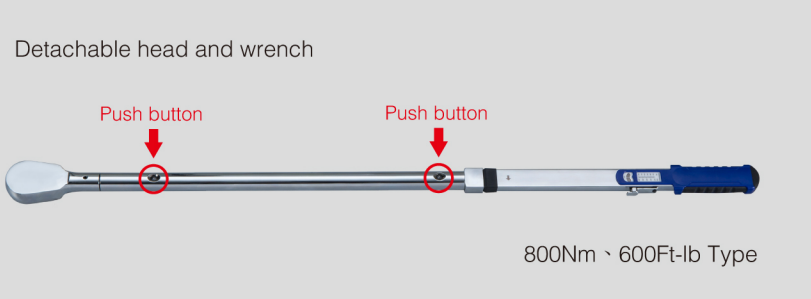

Detachable head and wrench
Push button
Push button
800Nm ~ 600FT-lb Type

● Watch Operation Video Online 

● FEATURES

- Torque of tolerance -- unflexed +/-4%; flexed +/-4%~+/-10%.
- Non coil-spring mechanism and no need to return to zero after use, which brings longer tool life.
- Knob-type torque adjustment is faster and more energy-efficient.
- Toothed hinge cover contains the lock function, which can prevent setting from being changed accidentally.
- Torque setting can be easily read through the window scale.
- Conversion table to N.m displayed on the handle.
- TPR cushion handle provides comfort, easy control and oil-resistance.
- Torque measurement in a clockwise direction only with 15 degree flex. head.
- Loud click sound and strong impulse when required torque is reached.
- Quality meets DIN ISO 6789 & ASME B107.300-2010.

SPECIFICATIONS									
TT NO.	Head Type	Square drive	Teeth	Swing arc	Nm	Graduation	g	L(mm)	case/CTN
68298-1F	Flex Ratchet	1/4"	90T	15°	4-20	0.5	400	258	24
68298-2F	Flex Ratchet	1/4"	90T	15°	5-25	0.5	400	258	24
68398-1F	Flex Ratchet	3/8"	90T	15°	14-68	2	950	475	12
68398-2F					25-130	5	950	475	12
68498-1F	Flex Ratchet	1/2"	90T	15°	40-200	5	1705	590	10
68498-2F					70-350	5	1705	590	10
68498-3F					80-400	5	1705	590	10
68698-2F	Detach-Ratchet	3/4"	72T	-	270-800	10	5450	1265	2

TT NO.	Head Type	Square drive	Teeth	Swing arc	ft-lb (n·lb)	Graduation	g	L(mm)	case/CTN
68298-1C	Flex Ratchet	1/4"	90T	15°	40-200	4.5	400	258	24
68298-2C	Flex Ratchet	1/4"	90T	15°	45-225	4.5	400	258	24
68398-1C	Flex Ratchet	3/8"	90T	15°	10-50	1	950	475	12
68398-2C					20-100	2	950	475	12
68398-3C					120-600	10	950	475	12
68498-1C	Flex Ratchet	1/2"	90T	15°	30-150	5	1705	590	10
68498-2C					40-250	5	1705	590	10
68498-3C					60-300	5	1705	590	10
68498-4C	Flex Ratchet	1/2"	72T	15°	85-350	5	2275	790	6
68698-2C	Detach-Ratchet	3/4"	72T	-	200-600	10	5450	1265	2

Hot News

TAIPEI CYCLE D&I AWARDS 2026

2~10Nm Aluminum Mini Torque Wrench





Watch the Video

● 2~10NM ALUMINUM MINI TORQUE WRNECH WINS TAIPEI CYCLE D&I AWARDS 2026

We are very pleased to announce that our "2~10Nm Aluminum Mini Torque Wrench" has received the honor of TAIPEI CYCLE d&i awards 2026! This award represents the significant growth and abundant creativity of the bicycle industry.

The Mini Aluminum Torque Wrench is specifically engineered for low-torque applications and precision fastening of small components. Its compact and refined form factor makes it highly portable, while offering exceptional accuracy and user-friendly operation.



Mini Torque Screwdriver
4mm 5~60 cNm
REPAIRING



Watch the Video

● WATCH PRODUCT REPAIR VIDEOS ONLINE

Online product repair videos have been prepared and available now. They includes the repair of scale-ring set for mini torque screwdriver, the repair of ratchet head & extension bar assembly for 2500Nm torque wrench, and the change of handle & scale plate for robust toruqe wrench. These will help users to learn more about the product troubleshooting, repair method and re-calibration SOP for our products.

Please visit our website at <http://www.tw-tech.com.tw> and click "VIDEO" button on the top for watching.

Exhibition Information



AAPEX 2026
Nov. 03 ~ 05, 2026
Level 2, Booth No.: V5825
The Venetian Expo in Las Vegas, U.S.A.



bauma CHINA 2026
Nov. 24 ~ 27, 2026
Hall:E3; Booth No.289
Shanghai New International Expo Centre (SNIEC), China

 **TORQUE-TECH PRECISION CO., LTD. 寶達精業股份有限公司**

No.70-7,Qingguang Rd., Wuri Dist., Taichung City,414020 Taiwan, R.O.C.
Tel: +886-4-23351877 | Fax: +886-4-23351785 | E-Mail: tw-tech@tw-tech.com.tw
[Website: www.tw-tech.com.tw](http://www.tw-tech.com.tw) | tw-tech.en.alibaba.com
All rights reserved | Liability Disclaimer

